

Scaling of All-Inorganic Perovskite Solar Cells through Improved Thermomechanical and Optoelectronic Stability

Hanson Nguyen, Electrical Engineering GCSP/FURI
 Nicholas Rolston, Assistant Professor, ECEE
 Arizona State University, Tempe, AZ



Optoelectronic Properties






Thermomechanical Properties

Driving Question


In less than 80 minutes, enough sunlight's hits the earth's atmosphere to power the earth's energy needs for 1 year. **What is holding us back from using this energy?**

Background


Perovskite solar cells (PSC) have the potential for low-cost processing and tunable band gaps. All-inorganic CsPbI₃ is a type of high bandgap perovskite that is more compositionally and thermally stable in comparison to their organic counterparts, making it ideal for tandem cells. However, CsPbI₃ has poor phase stability and requires high formation energy, resulting in poor performance and stability [1,3].

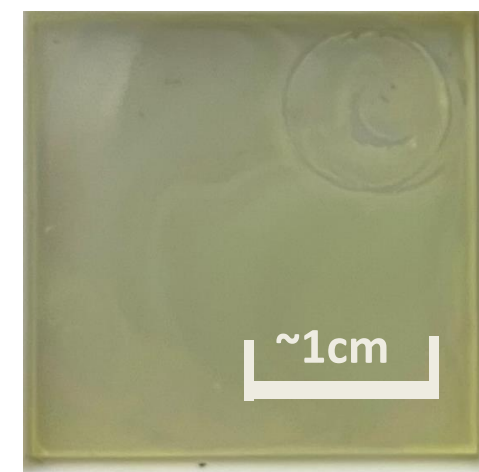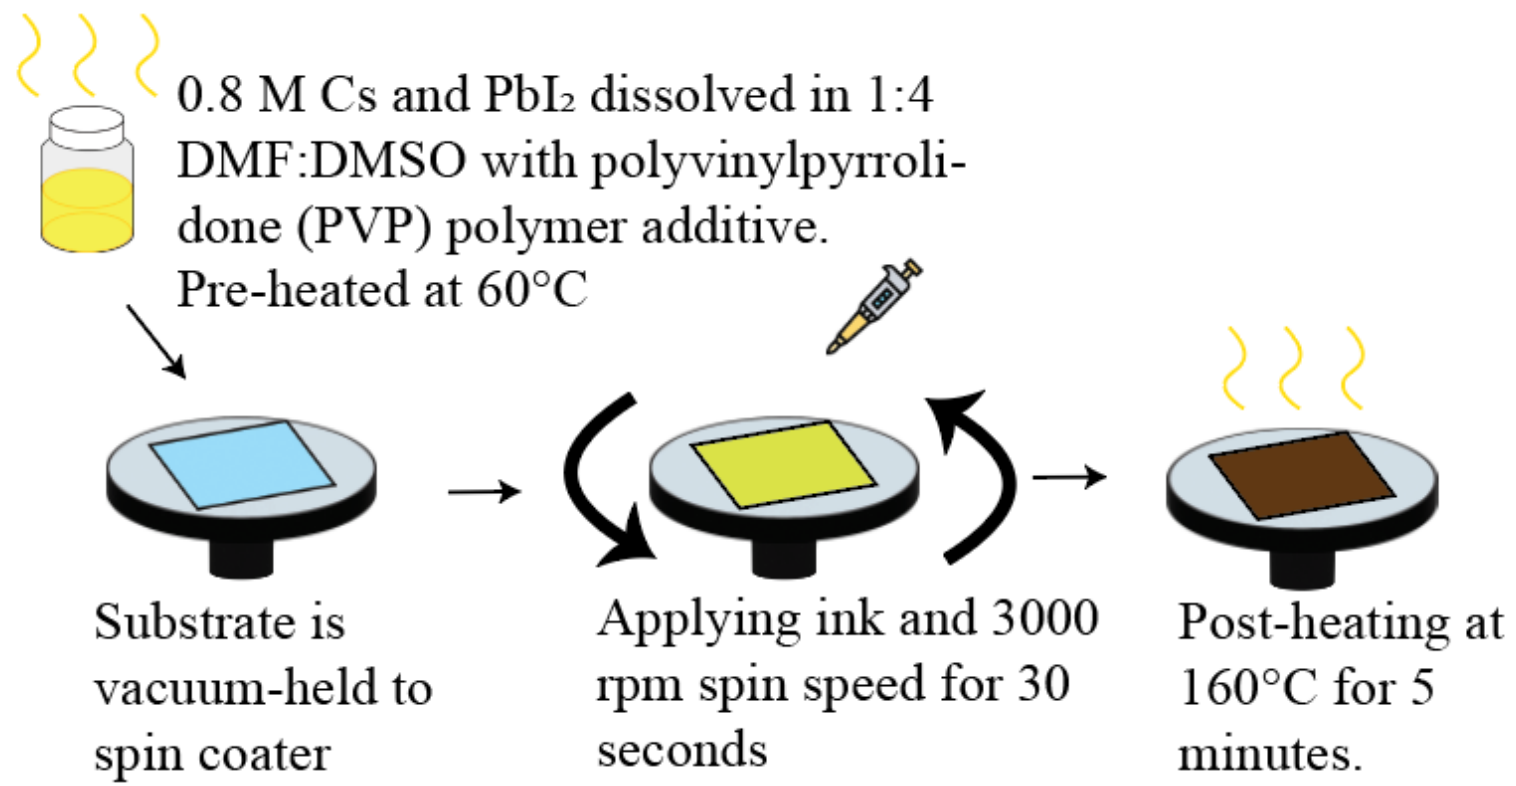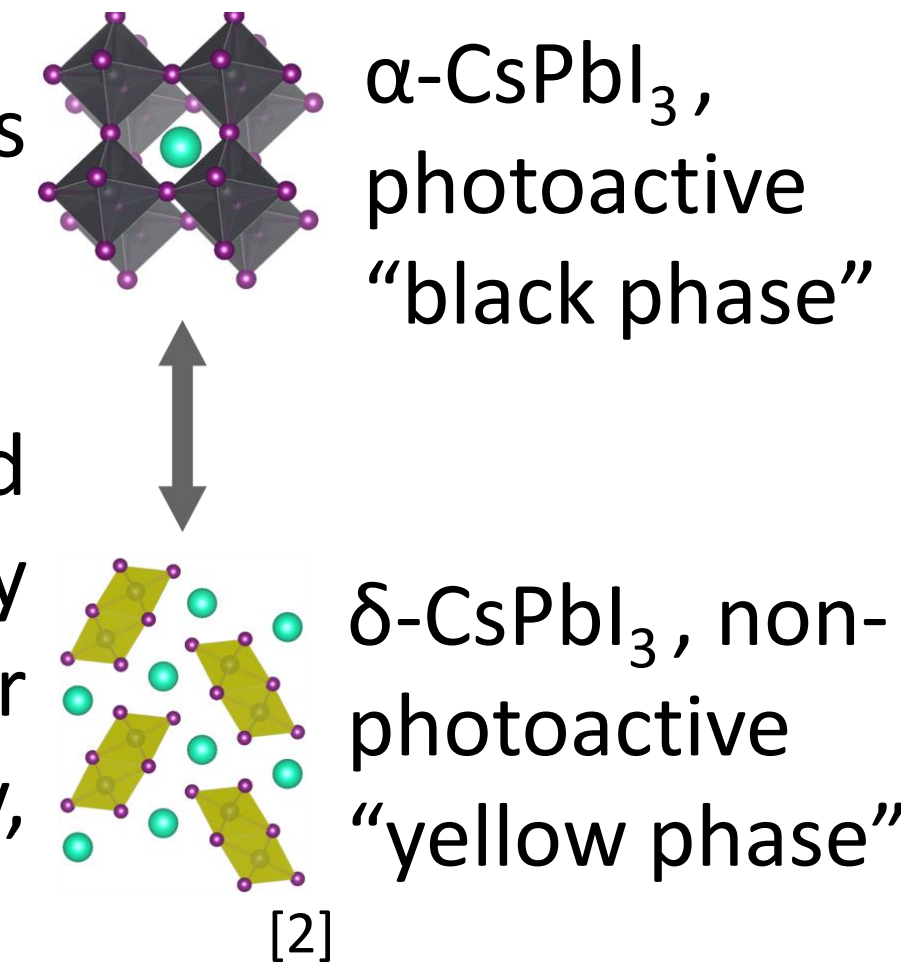

0% PVP, yellow phase

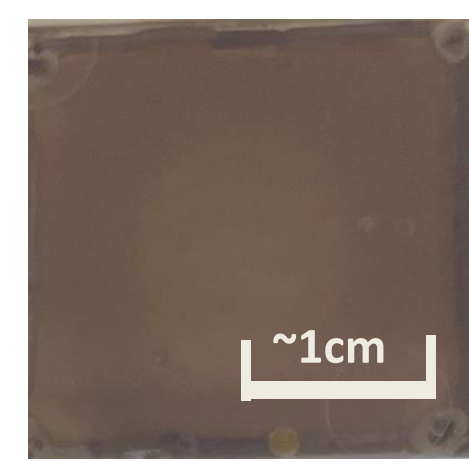


3.4% PVP, darkened, non uniform

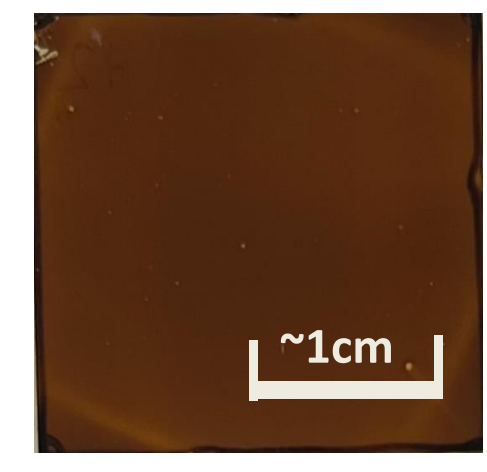

6.5% PVP, ideal brown/black phase

Phase 1: Thermomechanical Properties



This study shows a stabilized phase and improved durability of all-inorganic CsPbI₃ films through the polymer polyvinylpyrrolidone (PVP) as a precursor additive. PVP induces a desired compressive state and the removal of PVP is shown to affect low concentrations of PVP more significantly.

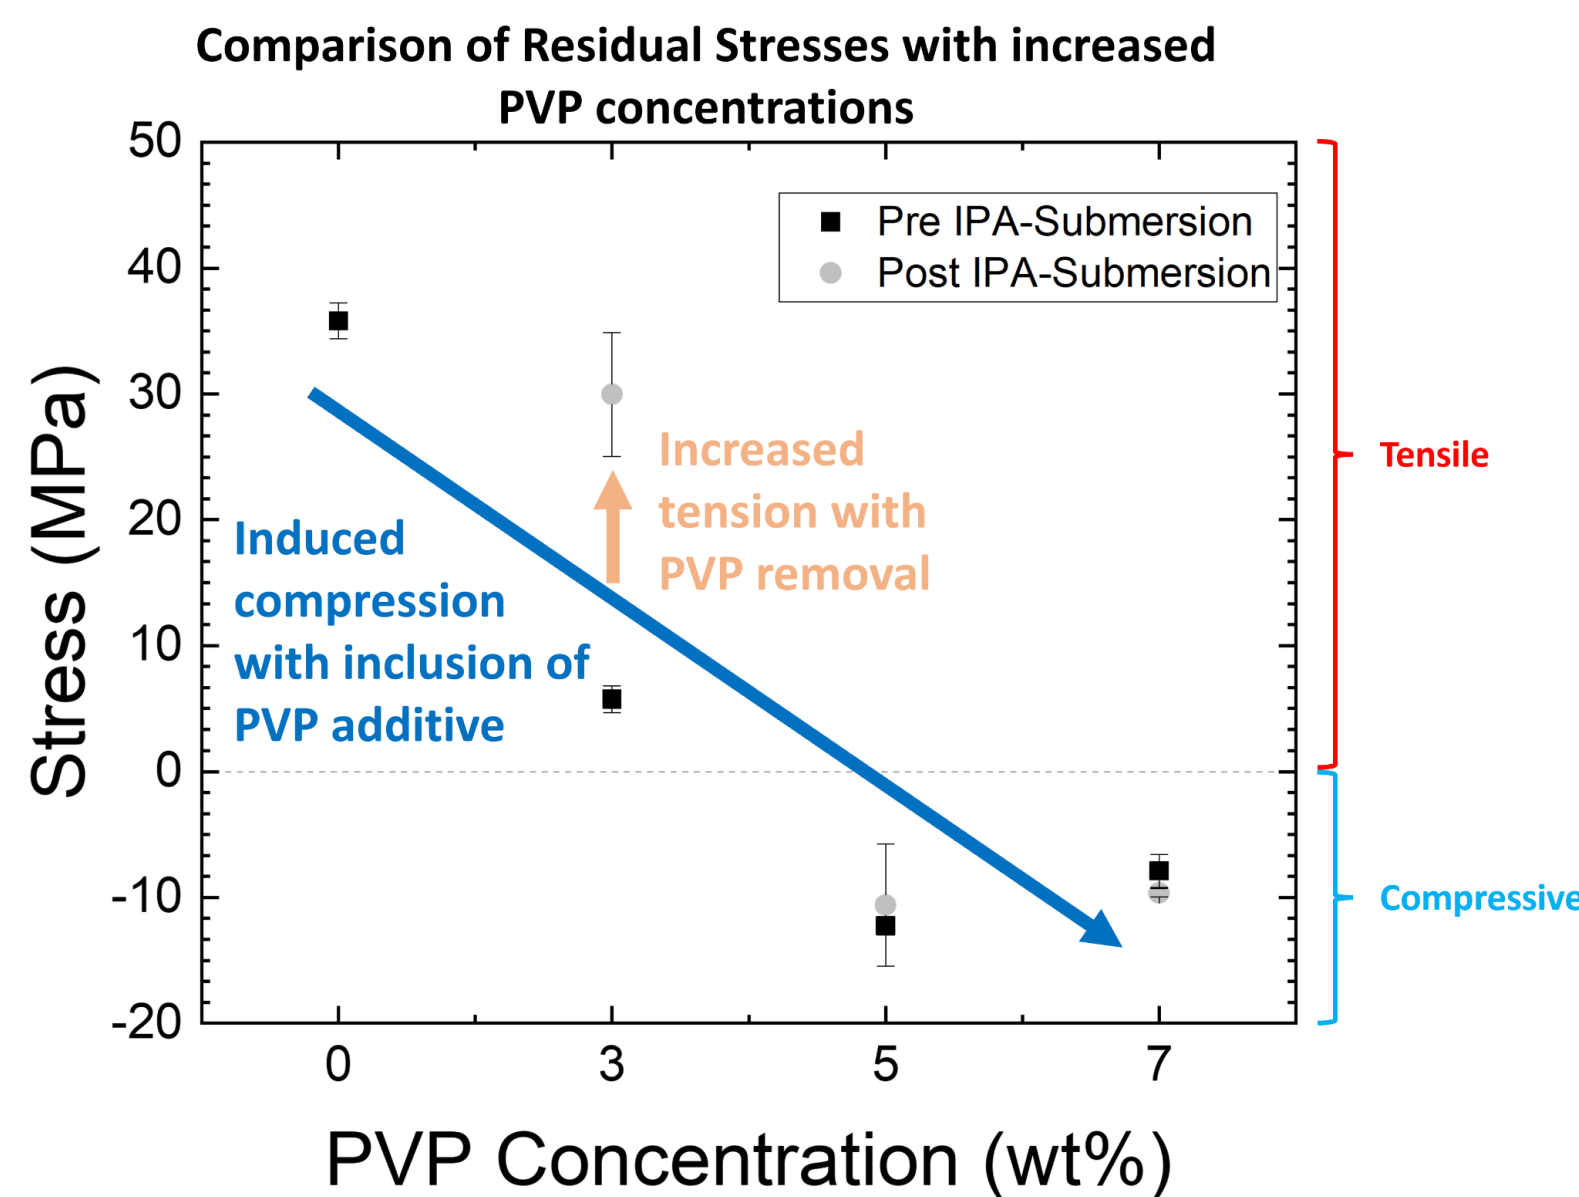

PVP Concentration	0%	3%	5%	7%
Pre-IPA Stress (MPa)	35.8	5.75	-12.25	-7.9
Post-IPA Stress (MPa)	---	29.97	-10.6	-9.63

Phase 2: Optoelectronic Properties

This research demonstrates the improved optoelectrical properties of photoluminescent (PL) and ionic properties of CsPbI₃ under thermal aging and light exposure due to the polymer polyvinylpyrrolidone (PVP) as a precursor additive for CsPbI₃ for perovskite devices and films

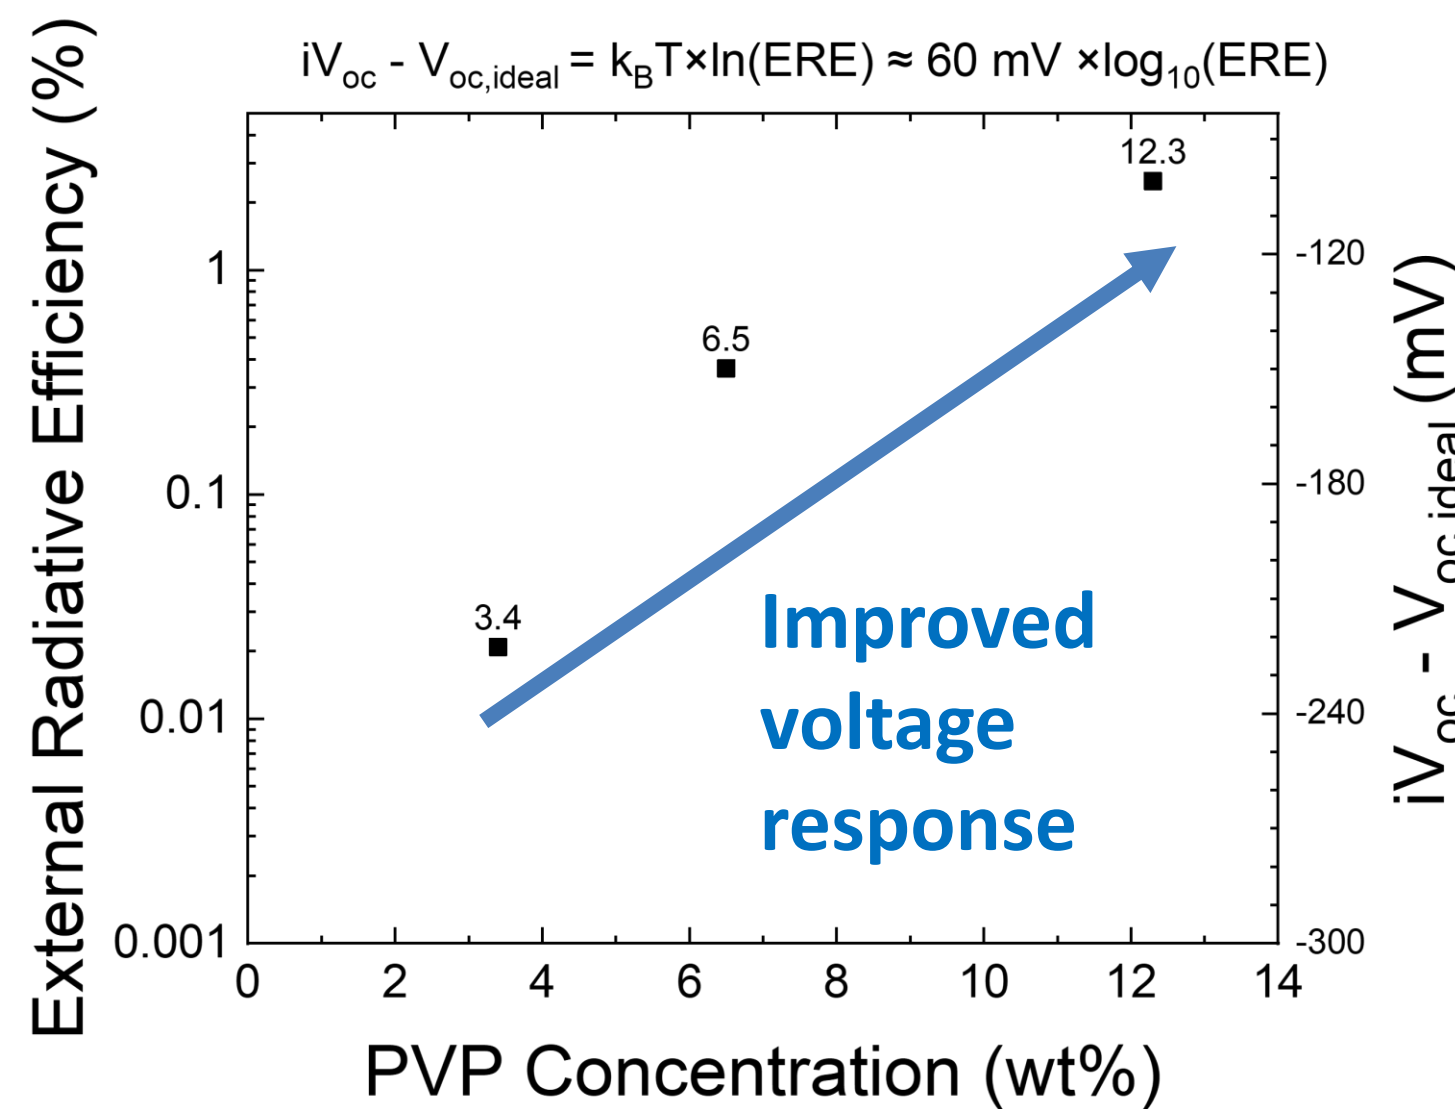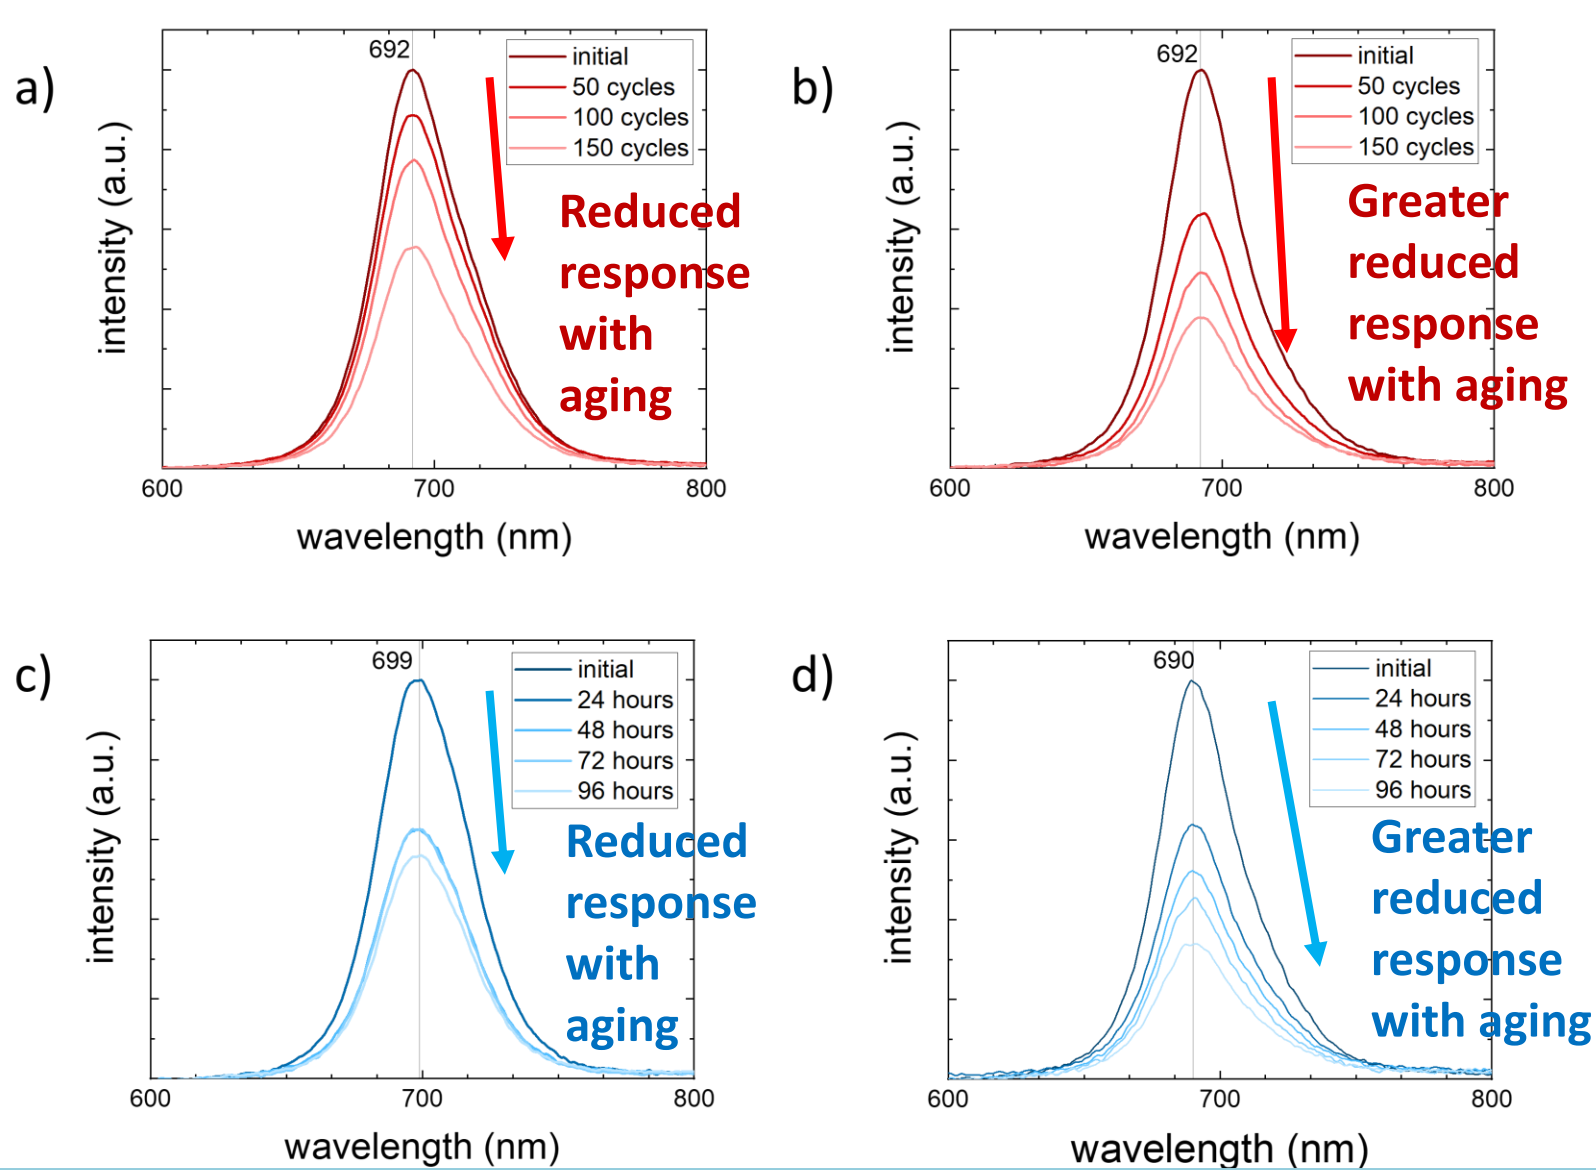

Future Work

- Further study how optoelectronic properties evolve with ion concentration
- Further tune film residual stresses via additive engineering while optimizing optoelectronic properties.

PL under thermal cycling with PVP a) kept, b) removed and light-induced aging with PVP c) kept, b) removed. Responses decrease more significantly under PVP removed.

ERE responses of varying concentrations. Higher responses are shown with larger PVP concentrations

References

- [1] Xiaoming Zhao et al., Accelerated aging of all-inorganic, interface-stabilized perovskite solar cells. *Science* 377, 307-310 (2022). DOI: 10.1126/science.aba5679
- [2] "Exploring the black-to-yellow phase transformation mechanism of metal halide perovskites via machine learning potentials." Exploring the black-to-yellow phase transformation mechanism of metal halide perovskites via machine learning potentials | Center for Molecular Modeling. <https://molmod.ugent.be/subject/exploring-black-yellow-phase-transformation-mechanism-metal-halide-perovskites-machine> (accessed Nov. 3, 2023).
- [3] Julian A. Steele et al., Thermal un-equilibrium of strained black CsPbI₃ thin films. *Science* 365, 679-684 (2019). DOI: 10.1126/science.aax3878

Acknowledgments

Special thanks to Dr. Nicholas Rolston, Muneeza Ahmad, Saivineeth Penukula, Muzhi Li, Mason Mahaffey and the rest of the Rolston Lab group for helping me get this data through their mentorship!

